



RB280304IN



RA260000:

Heavy duty hinge support (RB 2x)

RA430100:

Storage container with lid, anthracite

## Fridge-freezer combination 200 series

177.2 x 55.8 cm, flat hinge

RB280304IN

3 climate zones incl. 1 fresh cooling drawer with manually adjustable humidity

Height adjustable safety glass shelves

Door racks with aluminium profiles

Innovative defrost technology:

- Reduced energy consumption due to new evaporator design - Faster defrosting and easier cleaning due to less severe and more uniform ice build-up - Safety glass shelf between freezer drawers

Cushioned door closing system allowing a soft and controlled door closure

Net volume 254 litres

### Handling

Electronic temperature control with digital display.

Touch keys.

### Technical features

Automatic defrosting with defrost water evaporation.

Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

### Cooling

Fast cooling.

Temperature adjustable from +2 °C to +8 °C.

5 safety glass shelves, of which 1 is fully extendable and 4 height adjustable.

Wine and champagne rack for 4 bottles, can be completely folded.

1 large door rack with aluminium profile for bottles with flexible bottle holder.

4 door racks with aluminium profile.

Bright interior lighting with integrated glare-free side light elements.

Net volume 187 litres.

### Fresh cooling

1 full width fresh cooling drawer.

Humidity can be adjusted manually.

Ideal for fruit and vegetables.

### Freezing

No-frost technology with fast freezing.

Temperature adjustable from -24 °C to -14 °C.

4-star freezer compartment.

Defrost assistance.

Freezing capacity 6 kg/24 h.

Storage time after a malfunction 10 h.

3 freezer drawers, 1 of which extra large.

2 safety glass shelves.

Net volume 67 litres.

### Consumption data

Energy consumption 223 kWh/year.

Noise level 38 dB (re 1 pW).

### Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.


Max. door panel weight:

Upper door 19 kg. Lower door 19 kg.



### Connection

Total connected load 0.090 KW.

Connecting cable 2.3 m with plug.

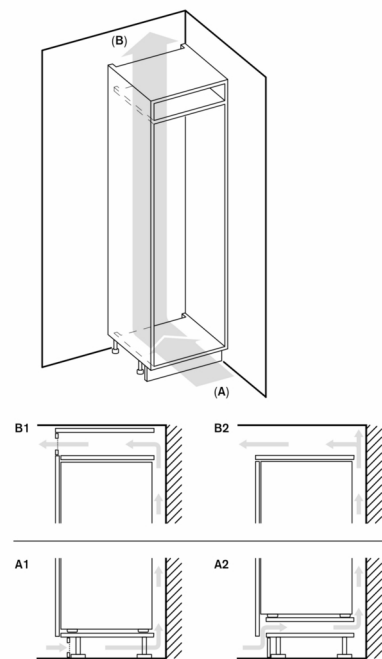

A: Air inlet  $\geq 200\text{ cm}^2$ ; ventilation options A1 or A2  
B: Air outlet  $\geq 200\text{ cm}^2$ ; ventilation options B1 or B2

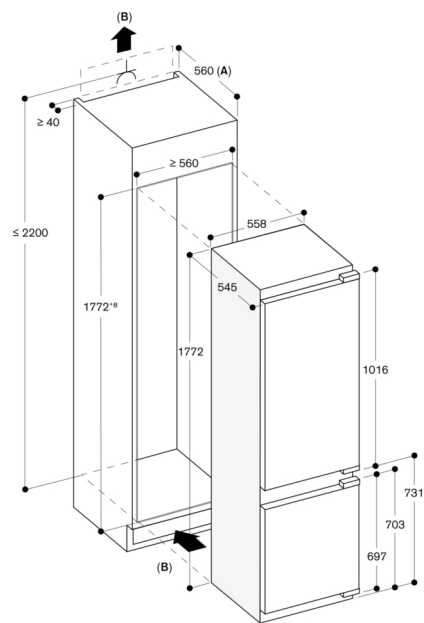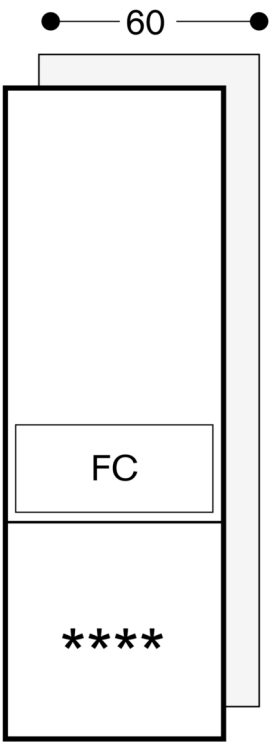

A: 560 mm recommended, min. 550 mm  
B: min. 200 cm<sup>2</sup>  
A: Socket  
measurements in mm