



RC200300



RA430100:

Storage container with lid, anthracite

200 series

82 x 60 cm, soft close flat hinge

RC200300

Combines with freezer RF 200 (Side-by-side)
Cushioned door closing system allowing a soft and controlled door closure
Net volume 137 litres

Technical features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Cooling

3 safety glass shelves, 2 of which height adjustable.
1 pull-out drawer.
1 vegetable compartment.
1 large door rack for bottles.
2 door racks.
Bright interior lighting.

Consumption data


Energy consumption 119 kWh/year.
Noise level 38 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 19 kg.
Height-adjustable feet.
Plinth height for niche height of 820 mm: 100 - 170 mm.
Plinth height for niche height of 870 mm: 150 - 220 mm.
The enclosed ventilation grille must be used.
The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 0.090 KW.
Connecting cable 2.3 m with plug.

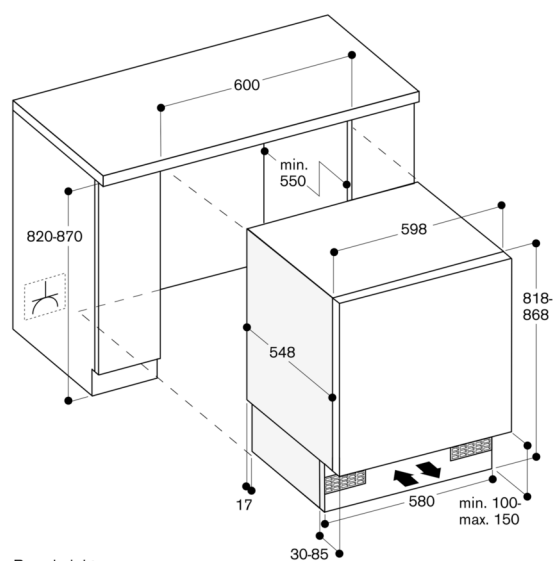

Base height:
- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm

