



Color Variants

RC472301
with fresh cooling close to 0 °C
fully integrated

Included accessories

1 x egg box with lid.

Required installation accessories

RA460000

Installation Accessories

RA421710
Stainless steel door panel with handle
RA425110
Handle bar, stainless steel, long
RA460020
Connecting element for vertically split
appliance fronts (for a flush front).

RC472301

Vario refrigerator 400 series
with fresh cooling close to 0 °C
fully integrated
Niche width 76.2 cm, Niche height 213.4 cm

Stainless steel interior
Generous lighting concept
Solid aluminium door racks
Net volume 479 litres
Fresh cooling drawer, temperature control from 0 °C to 3 °C
One motorised glass shelf, adjustable when fully loaded
Energy efficiency class A+

Handling

Electronic temperature control with digital display.

Technical Features

Dynamic cold air distribution with Multi-Air-Flow.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
Rest mode certified by Star-K.
Open-door and malfunction alarm.

Cooling

Net volume 413 litres.
No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
4 safety glass shelves, 1 of which is motorised, 2 manually adjustable.
2 fully extendable drawers with transparent front, 1 of which deep and 1 shallow.
Bright interior lighting with light pillars.
3 height adjustable door racks, 1 of which is extra deep.
1 door rack with transparent front flap.

Fresh cooling close to 0 °C

Net volume 66 litres.
Separate automatic temperature control, with settings for fish, meat or vegetables.
1 large, fully extendable drawer with transparent front and integrated lighting.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.
Energy consumption 182 kwh/year.
Noise level 40 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 21 kg.

Connection



Total connected load 0.311 kW.
Connecting cable 3.0 m, pluggable.

Characteristics


Built-in / Free-standing
Built-in
Number of compressors
1
Number of independent cooling systems
1
Width of the product (mm)
756
Height (mm)
2125
Depth of the product
608
Net weight (kg)
175.456
Required niche size for installation (HxWxD)
2134.0 x 762.0 x 610
Door panel options
Not possible
Door hinge
Right reversible
Number of Adjustable Shelves in fridge compartment
3
Shelves for Bottles
No
Frost free system
Full
Interior ventilator
Yes
Reversible Door Hinge
Yes
Length electrical supply cord (cm)
300
Noise level (dB)
40
Multi-Flow Air Tower
Yes
Fast cooling switch
Yes
Fast freezing switch
No
Carbon Air Filter
No
Temperature Controlled Drawer
Yes
Humidity Control Drawer
Number of Door Bins - Refrigerator
3
Door bin adjustability - Refrigerator
No
Tilt-out door bins in fridge
Yes
Number of Gallon storage
1
No. of shelves in fridge
4
Number of shelves - Freezer
Shelf Adjustability - Freezer
No
Capacity of Water Tank [l]

Consumption and connection features

Connection Rating (W)
311
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50
Energy consumption (kWh)
Freezing capacity (kg)
Storage Period in Event of Power Failure (h)
Approval certificates
CE, VDE
Universal Product Code
825225955726
Color / Material body
Colour.Material door
Door panel options
Not possible
Noise level (dB)
40
Total annual energy consumption (kWh)
Energy Star Qualified
No
Length of electrical supply cord (in)

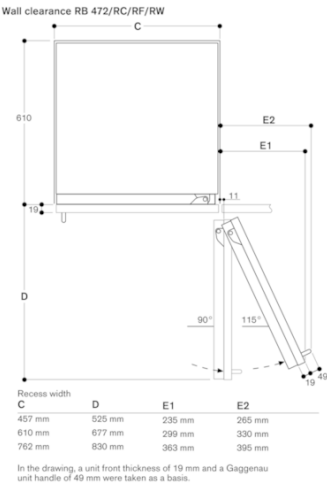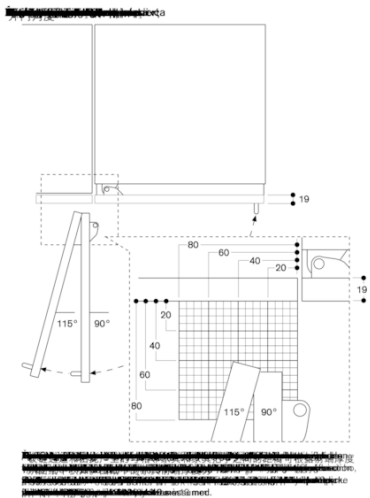

Base detail

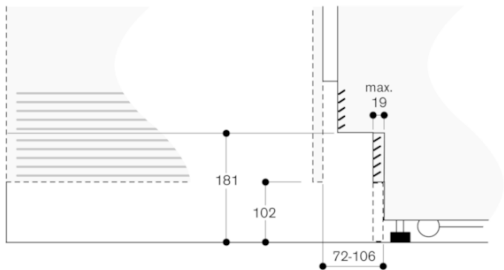

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.