



RF200300



200 series

82 x 59.8 cm, soft close flat hinge

RF200300

- Cushioned door closing system allowing a soft and controlled door closure
 - Combines with cooler RC 200 (Side-by-side)
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 98 litres

Technical features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Malfunction signal.

Freezing

Fast freezing.

Temperature range adjustable.

4-star freezer compartment.

Freezing capacity 12 kg/24 h.

Storage time after a malfunction 23 h.

3 freezer drawers.

Consumption data

Energy consumption 190 kWh/year.

Noise level 38 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 19 kg.

Height-adjustable feet.

Plinth height for niche height of 820 mm: 100 - 170 mm.

Plinth height for niche height of 870 mm: 150 - 220 mm.


The enclosed ventilation grille must be used.

The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 0.090 KW.

Connecting cable 2.3 m with plug.

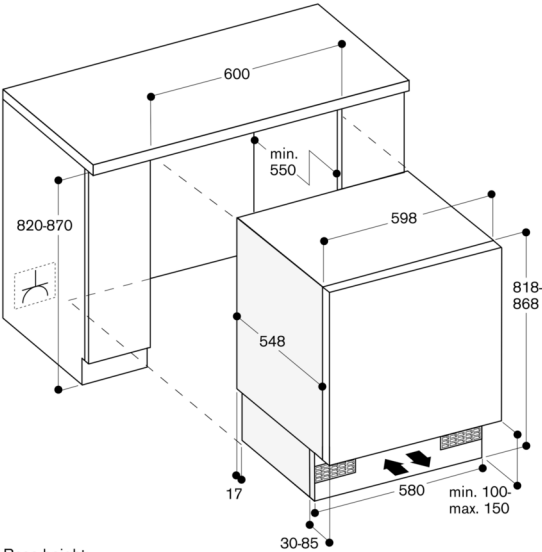

Base height:
- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm

● — 60 — ●

