



RW414365

1 x connection set

RA430000:

Screw hole cover set

RA491161:

Extendable bottle tray, oak wood, RW 414

RA492160:

Tray, oak wood, for RW414

RA493060:

DECOR FRAME RA 493-060

RA498140:

Bottle support, oak wood, for RW414

RA420010:

Door lock for RW 414 and RW 464/466

RA421111:

SS doorframe 45,7cm / 18" left

RA428111:

SS doorframe w/o handle 45,7cm / 18"

RA460013:

Heating side kit 230V

RA464111:

Vent grille 45.7cm / 18" w/o filter

RA421112:

SS doorframe 45,7cm / 18" right

RA423140:

Side trims, long

RA425110:

Vario SS handle 1131 mm

## Vario wine climate cabinet 400 series

212.5 x 45.1 cm

RW414365

2 independently controllable climate zones  
Consistent temperatures with exact control from  
+5 °C to +20 °C

Humidity control.

Stainless steel interior

Fully extendable bottle trays in oak wood and  
solid aluminium in anthracite.

Bottle trays with hidden telescopic rails

Warm white and glare-free LED light spots

5 preset lighting scenarios, selectable via TFT  
display

Opening assist for door with two options:

1. Push-to-open function for integration into  
handleless furniture front 2. Pull-to-open  
function to facilitate opening the door using a  
handle

Low-vibration operation

TFT touch display

Number of standard wine bottles: 70

### Handling

TFT touch display operation.

Clear text display.

Lockable door (with door lock RA 420 010).

### Technical features

Dynamic cold air distribution.

Automatic defrosting with defrost water  
evaporation.

Cushioned door closing system.

Activated charcoal air filter.

UV-protection.

Rest mode certified by Star-K.

When rest mode is active, the appliance can  
only be opened using a handle.

Open-door and malfunction alarm.

### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Remote diagnostics.

Light scenarios.

Home network integration for digital services  
(Home Connect) wireless via WiFi.

The use of the Home Connect functionality  
depends on the Home Connect services, which  
are not available in every country. For further  
information please check: [home-connect.com](http://home-connect.com).

### Features

Capacity 70 bottles (based on 0.75 l standard  
bottles).

12 bottle trays,

- 10 fully extendable trays - 3 suitable for storage  
of Magnum bottles.

Flexible interior configuration possible by adding  
or removing fully extendable bottle trays.

Storage of up to 6 Magnum bottles with  
standard tray configuration (12 bottle trays).

Space for max. 13 bottle trays.

2 brilliant LED light spots with warm white,  
glare-free light (3500 K) in each climate zone.

5 different lighting scenarios can be selected for  
individual wine presentation.

Total volume 272 litres.

### Consumption data

Energy efficiency class G at a range of energy  
efficiency classes from A to G.

Energy consumption 145 kWh/year.

Noise level 42 dB (A) re 1 pW.

### Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 76 kg.

The mains socket needs to be planned outside  
the built-in niche.


No transport/operation above 2000 m sea level.

### Connection

Total connected load: 0.300 KW.

Connecting cable 3.0 m, pluggable.

### Bottle storage

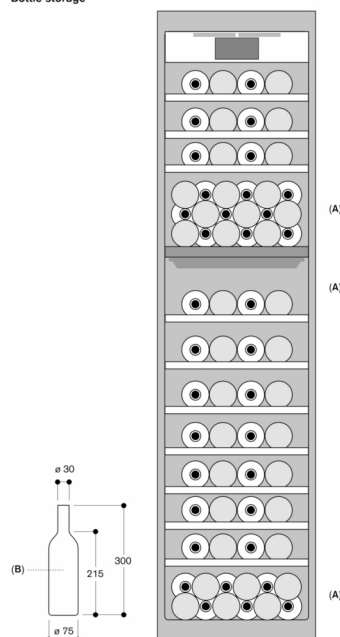


**A:** Suitable area for storage of magnum bottles in standard tray configuration



**B:** 0.75 litres

Measurements in mm

**Door opening angle**

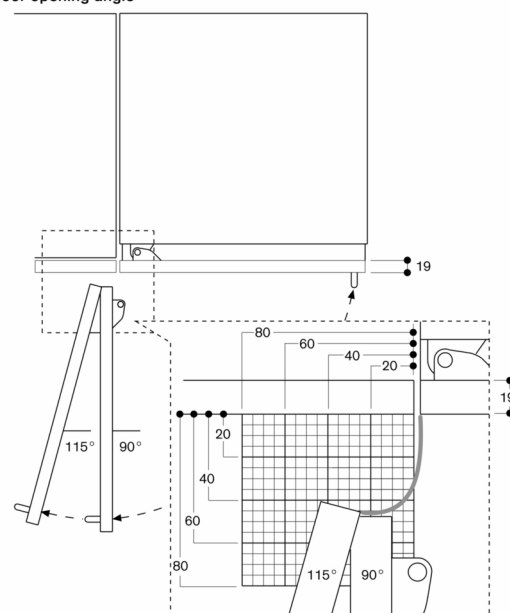

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

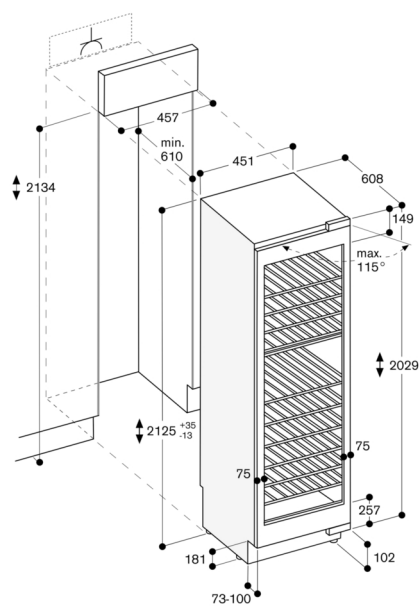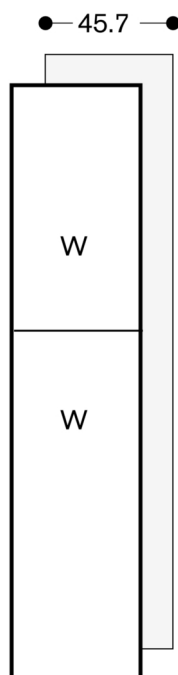

The maximum door panel dimensions are based on a clearance of 3 mm.

