



Color Variants

VG232220DE

Optional accessories

VD200020

Installation Accessories

VV200010

VV200020

Can be combined with the cooktops of the Vario 200 series to a harmonic unity Control panel for comfortable and secure operation
Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
Solid smooth-surface cast pan supports for easy and safe positioning of cookware

Cooking zones

1 high output burner (560 W - 3000 W), suitable for pots up to max. \varnothing 22 cm.
1 standard burner (380 W - 1900 W), suitable for pots up to max. \varnothing 20 cm.

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Cast pan support with continuous pot surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes

Special nozzles for liquid gas 50 mbar can be ordered as spare parts.
Appliance can be snapped into the worktop from above.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 65 cm.
The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product.
Appliance weight: approx. 8 kg.

Connection

Total connected load gas 4.9 KW.
Total connected load electric 10 W.
Connecting cable 1.5 m with plug.

Characteristics

Product name/family

Vario/Domino gas hob w control

Built-in / Free-standing

Built-in

Energy input

Gas

Total number of positions that can be used at the same time

2

Required niche size for installation

(HxWxD)

106 x 268 x 492

Width of the appliance

288

Dimensions

132x288x512 106x288x512

Dimensions of the packed product

(HxWxD)

260x400x600

Net weight

8.1

Gross weight

9.3

Residual heat indicator

Location of control panel

Front

Basic surface material

brushed stainless steel

Color of surface

Stainless steel

Color of frame

Stainless steel

Length electrical supply cord

150

Connection Rating

10

Gas connection rating

4900

Fuse protection

10

Voltage

220-240

Frequency



50; 60

Included accessories

Consumption and connection features

2025-12-17

Page 1

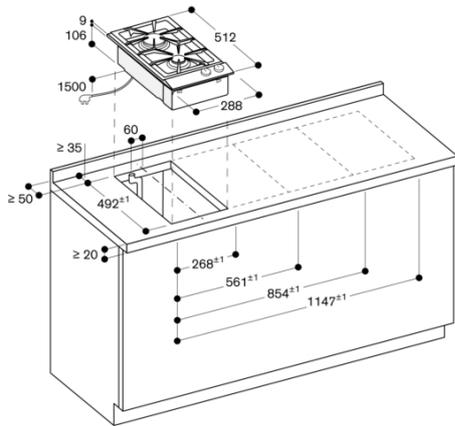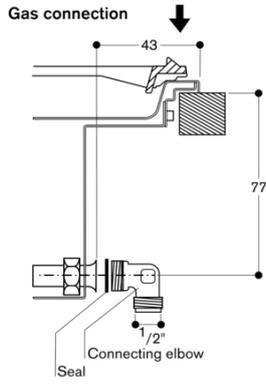

Minimum distance from the appliance cut-out to the side wall 150 mm.
measurements in mm