

**VI414103**  
**Induction cooktop 400 series**  
**Frameless**  
**Width 38 cm**

32 cm cooking zone with booster function  
 Ideal for the original wok pan with round bottom, with wok ring  
 Frying sensor function for temperature control in pans  
 Easy control of all functions with bicoloured display  
 Solid stainless steel control knob  
 Frameless for flush mounting  
 For combination within the set CVL 410

**Cooking zones**  
 1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

**Handling**  
 Control knobs with illuminated ring, cooking zone and output level markings.  
 Electronic power control in 12 output levels.  
 User friendly control with bicoloured display (white / orange).

**Features**  
 Frying sensor function.  
 Booster function.  
 Stopwatch.  
 Short-term timer.  
 Options menu.  
 Power management.  
 Cooktop-based ventilation control (with suitable hood).  
 Home network integration for digital services (Home Connect) wireless via WiFi.  
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

**Safety**  
 Operation indicator.  
 Pot detection.  
 2-stage residual heat indication.  
 Safety shut-off.

**Planning notes**  
 The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
 The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
 The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
 If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

**Characteristics**  
**Product name/family**  
 Vario/Domino cooking zone cera  
**Built-in / Free-standing**  
 Built-in  
**Energy input**  
 Electric  
**Total number of positions that can be used at the same time**  
 1  
**Required niche size for installation (HxWxD)**  
 57 x 360-389 x 492-527  
**Width of the appliance**  
 384  
**Dimensions**  
 57 x 384 x 521  
**Dimensions of the packed product (HxWxD)**  
 128 x 580 x 610  
**Net weight**  
 9.4  
**Gross weight**  
 10.5  
**Residual heat indicator**  
 Separate  
**Location of control panel**  
 External control  
**Basic surface material**  
 Ceramic  
**Color of surface**  
 Black  
**Color of frame**  
 Approval certificates  
 AENOR, CE  
**Length electrical supply cord**  
 150  
**Connection rating**  
 3700  
**Gas connection rating**  
 Fuse protection  
 16  
**Voltage**  
 220-240  
**Frequency**  
 50; 60

**Consumption and connection features**  
 2022-02-18  
 Page 1


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above.  
 Appliance weight: approx. 9 kg.

**Connection**  
 Total connected load 3.7 KW.  
 Connecting cable 1.5 m without plug.  
 Power consumption standby/display off 0.5 W.  
 Power consumption standby/network 1.4 W.  
 Please check the user manual for how to switch off the WiFi module.

**Color Variants**  
 VI414103  
 Frameless  
 Width 38 cm


**Optional accessories**  
 GP900001  
 Stainless steel frying sensor pan  
 GP900002  
 Stainless steel frying sensor pan  
 GP900003  
 Stainless steel frying sensor pan  
 GP900004  
 Stainless steel frying sensor pan  
 WP400001  
 Wok pan made of multiple-layer material

Installation of the control knob; flush installation

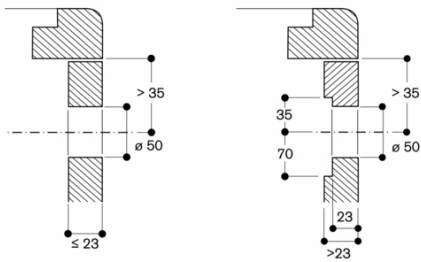


measurements in mm

Cross-section

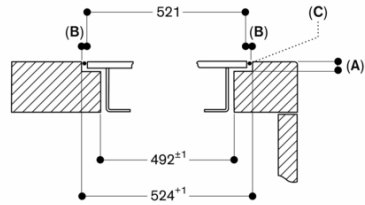

- A: 6.5<sup>+0.5</sup>
- B: 1.5
- C: Fill with silicone


measurements in mm

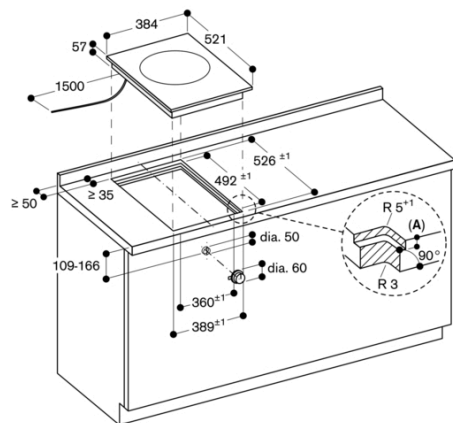

- A: 6.5<sup>+0.5</sup>

measurements in mm

Longitudinal section

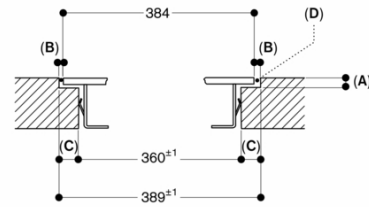

- A: 6.5<sup>+0.5</sup>
- B: 2.5
- C: 14.5
- D: Fill with silicone

measurements in mm