



VI492613

Optional accessories

CA051300:

Teppan Yaki (large)

WP400001:

Wok pan

WZ400000:

Wok ring

Installation accessories

VA420004:

Connecting strip Serie 400, flush, short

Vario Flex induction cooktop 400 series 36"

VI492613

Flex function for combining the rectangular cooking areas

Flexible positioning of cookware inside combined cooking areas

Frying sensor function for temperature control in pans

Large cooking zone for pots up to ø 32 cm
Ideal for the original wok pan with round bottom, with wok ring

Easy control of all functions with bicoloured display

Solid stainless steel control knob

Precision crafted 3 mm stainless steel

For surface mounting with a visible edge or for flush mounting

Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas 21.5x19 cm (2200 W, with booster 3600 W), linked together
21.5x38 cm (3300 W, with booster 3600 W).

2 flex induction cooking areas 21.5x19 cm (2200 W, with booster 3600 W), linked together
21.5x38 cm (3300 W, with booster 3600 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.

Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).

Remote monitoring.

Remote diagnostics.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

Planning notes

Depending on the type of installation

(surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

The horizontal positioning of the knobs may be aligned with the specific cooking areas and zones.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 28 kg.

Connection


Total connected load 9.4 KW.

Total Amps: 50 A.


208 - 240 V / 60 Hz.

Connecting cable 1.50 m without plug.

Please check the user manual for how to switch off the WiFi module.

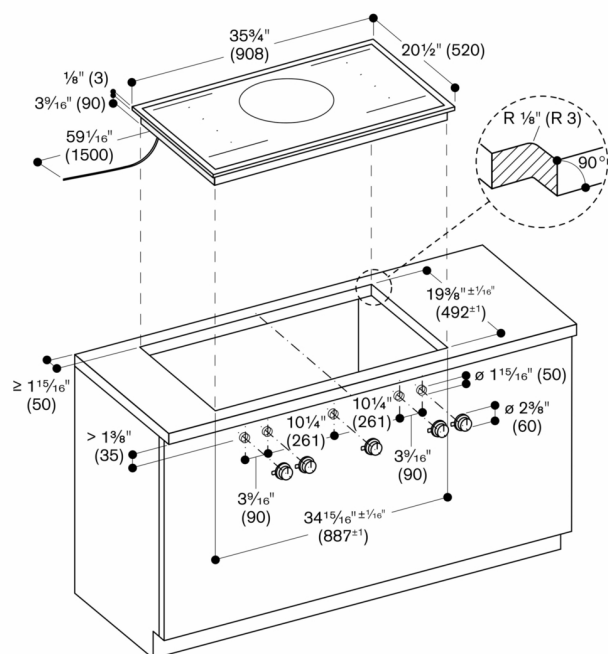


measurements in inches (mm)

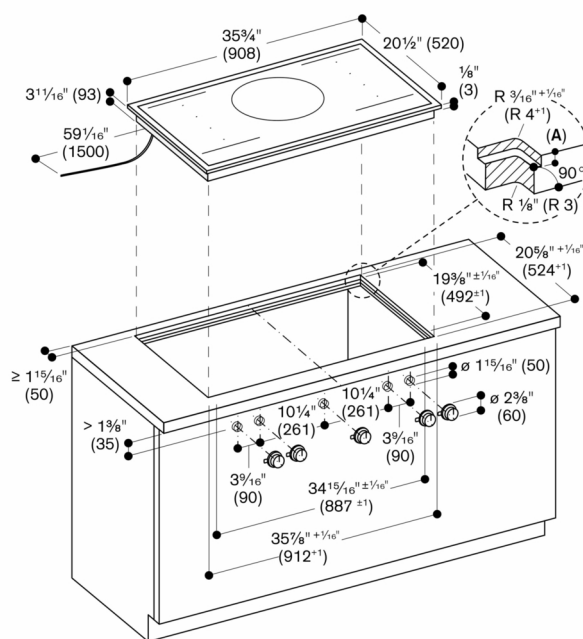

A: $\frac{1}{8}''$ ($3.5^{-0.5}$)

measurements in inches (mm)

Cross-section

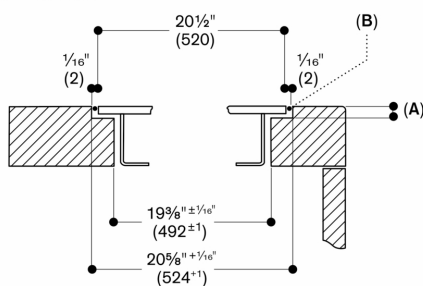


A: $\frac{1}{8}''$ ($3.5^{-0.5}$)

B: Fill with silicone


measurements in inches (mm)

Installation of the control knob; surface mounting

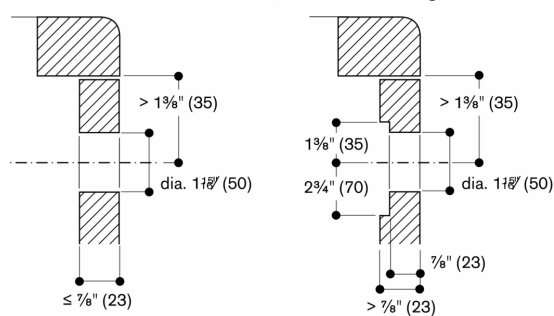


measurements in inches (mm)

Installation of the control knob; flush installation

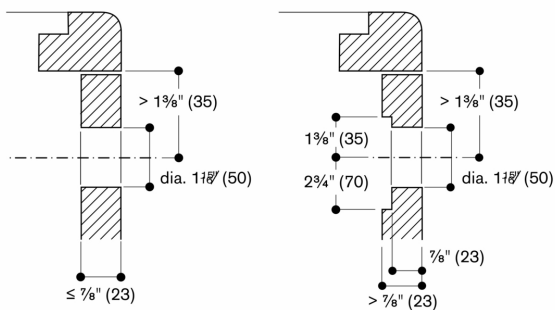


measurements in inches (mm)

View from above

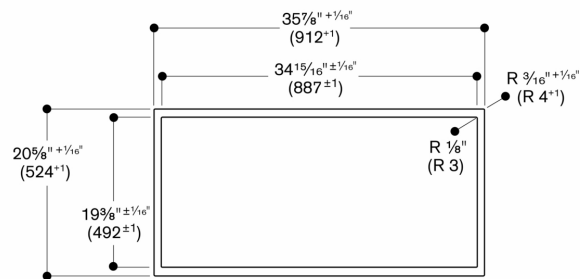

measurements in inches (mm)

Longitudinal section

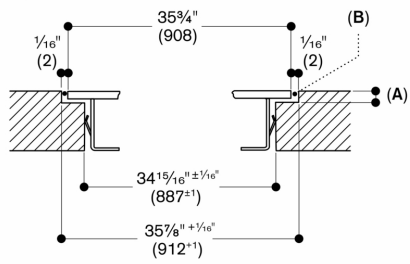

A: 1/8" (3.5^{-0.5})

B: Fill with silicone

measurements in inches (mm)