



VK230714
Vario steamer 200 series
Stainless steel control panel
Width 12 "

Can be combined with the cooktops of the Vario 200 series to a harmonic unity
Generous control panel for comfortable and secure operation
Steaming in cooktop size
Exact water temperature control from 45 °C to 95 °C
Cooking on two levels, without flavour transfer

Cooking zones
Water capacity 1 to 6 litres.

Handling
Function display.
Electronic water temperature control from 45 °C to 95 °C, in 5 °C steps.
Steam cooking level with electronic steam control for pressureless cooking.

Features
Automatic boiling point detection.
Motor-driven water drain valve 1/2".
Electronic short-term timer up to 90 min.
Special heating system.

Safety
Remaining time display.
Child lock.
Operation indicator.
Automatic shut off.

Planning notes
Access to drain in bottom cabinet is required.
Appliance is intended for fixed water outlet connection, but can be fitted without fixed connection by using the special accessory AG 060.
Seal the worktop cutout.
Appliance can be snapped into the worktop from above.
A minimum clearance of at least 200 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
In case of suspended cabinets a ventilation hood must be installed above the steamer.
If a cover is fitted, the glass lid must be removed when closing it.
VK 230 and VF 230 must not be installed directly next to each other.
In combination with the downdraft ventilation VL 040/041, this must be planned on the right of VK.
Appliance weight: approx. 11 kg.

Connection
Total connected load 1.8 kW.
Connecting cable 1.2 m without plug.

Characteristics
Product name/family
Vario/Domino steam cooker
Built-in / Free-standing
Built-in
Energy input
Electric
Type of control
Electronic
Type of control setting and signalling devices
Sword knobs
Required niche size for installation (HxWxD)
280 x 268 x 490
Width of the product (mm)
288
Dimensions of the product (mm)
280 x 288 x 523
Dimensions of the packed product (HxWxD) (mm)
413 x 406 x 604
Net weight (kg)
11.357
Gross weight (kg)
12.9
Power on indicator
No
Location of control panel
Type of regulation
Stepless energy regulated
Basic surface material
Stainless steel
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel
Approval certificates
CSA, ETL, UL
Length electrical supply cord (cm)
120



Consumption and connection features
Electrical connection rating (W)
1800
Current (A)
8
Voltage (V)
120
Frequency (Hz)
60
2019-10-29
Page 1

Color Variants
VK230714
Stainless steel control panel
Width 12 "


Included accessories
2 x cooking insert.
1 x glass cover.
1 x hand grip.
1 x residuary filter.
1 x water drain valve.

Optional accessories
FK023000
Pasta basket
GE020010
Unperforated cooking insert
GE020020
Perforated cooking insert
VD201014
Brushed stainless steel appliance cover


Installation Accessories
VV200014
Stainless steel connection strip for combination with other Vario appliances of the 200 series

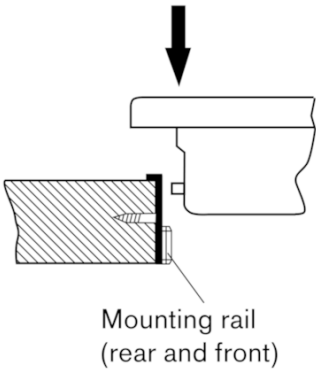

Εάν η εγκατάσταση γίνεται σε χώρο με υγρασία, πρέπει να χρησιμοποιηθεί ένα σύστημα προστασίας από την υγρασία. Ο ηλεκτρικός πίνακας πρέπει να είναι τουλάχιστον 1000 mm από το πάτωμα. Η απόσταση από το πάτωμα πρέπει να είναι τουλάχιστον 120 mm. Στο τέλος της εγκατάστασης, ο χώρος πρέπει να είναι στεγνός.



Если установка производится в помещении с повышенной влажностью, необходимо использовать систему защиты от влаги. Электрический шкаф должен быть не менее 1000 мм от пола. Расстояние от пола должно быть не менее 120 мм. В конце установки, помещение должно быть сухим.



Εάν η εγκατάσταση γίνεται σε χώρο με υγρασία, πρέπει να χρησιμοποιηθεί ένα σύστημα προστασίας από την υγρασία. Ο ηλεκτρικός πίνακας πρέπει να είναι τουλάχιστον 1000 mm από το πάτωμα. Η απόσταση από το πάτωμα πρέπει να είναι τουλάχιστον 120 mm. Στο τέλος της εγκατάστασης, ο χώρος πρέπει να είναι στεγνός.