



Color Variants

VP414110
Stainless steel
Width 38 cm

Included accessories

2 x spatula.

Installation Accessories

VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA420001
Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip

VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA420011
Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip

VA440010
Stainless steel appliance cover with mounting strip

VA450400
Stainless steel filler strip 38 cm

VP414110

Vario Teppan Yaki 400 series

Stainless steel

Width 38 cm

Cooking directly on the hard-chromed metal surface, without any pots or pans
Exact temperature control up to 240 °C
Optimum heat distribution
Solid stainless steel control knob
Precision crafted 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

Usable area W 31 x D 44 cm.

Handling

Control knobs with illuminated ring, cooking zone and temperature markings.
Electronic temperature control from 120 °C to 240 °C.

Features

Two zones, each 1500 W, can be operated together as a complete surface or each half separately. Keeping warm setting.
Even with traces of use, always easy to clean like a cast pan.

Safety

Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.

If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.

If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Characteristics

Product name/family

Vario/Domino Teppan Yaki

Built-in / Free-standing

Built-in

Energy input

Electric

Type of control

Electronic

Grill grating material

Required niche size for installation

(HxWxD)

72 x 360 x 490

Width of the product (mm)

380

Dimensions of the product (mm)

72 x 380 x 520

Dimensions of the packed product

(HxWxD) (mm)

232 x 455 x 593

Net weight (kg)

13.562

Grass weight (kg)

14.8

Residual heat indicator

Separate

Location of control panel

Basic surface material

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel

Approval certificates

Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE

Length electrical supply cord (cm)

Consumption and connection features

Electrical connection rating (W)

3000

Gas connection rating (W)

Current (A)

16

Voltage (V)

220-240

Frequency (Hz)

50; 60

2019-10-29

Page 1

Built-in control panel to be integrated in the bottom cabinet at drawer level.

Panel thickness 16 - 26 mm.

The drawing "Installation of the control knob" must be observed if the panel is more than 26 mm thick (there must be a recess at the rear).

A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 14 kg.

Connection


Total connected load 3.0 kW.

Plan a connection cable.


Installation with appliance cover/spacer batten;
 installation standing proud of surrounding surfaces

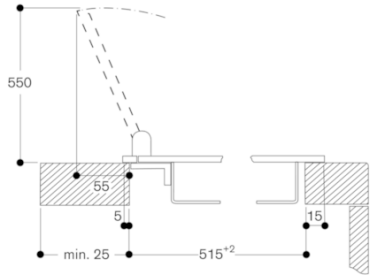

Installation with appliance cover/spacer batten;
 installation flush with surrounding surfaces

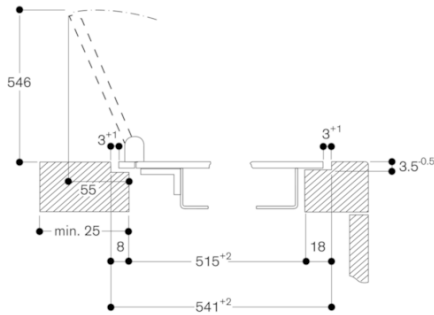


View from above





* with appliance cover or filler strip
 (observe the front and rear asymmetrical support,
 see separate notes "Installation with appliance
 cover/filler strip").

Cross-section

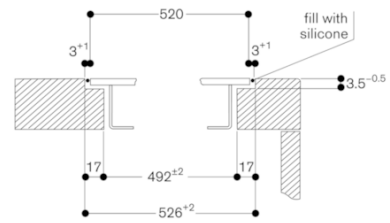


When installing with appliance cover or filler strip, pay attention
 to the deeper cut-out and the front and rear groove width.

Longitudinal section

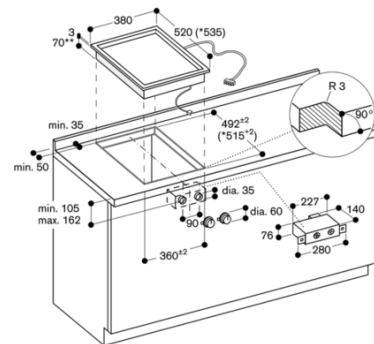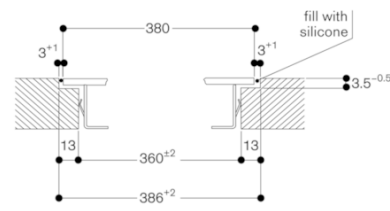


* with appliance cover or filler strip.
 See separate planning notes.
 ** 80 mm in the area of the cable clamp (right, centre).

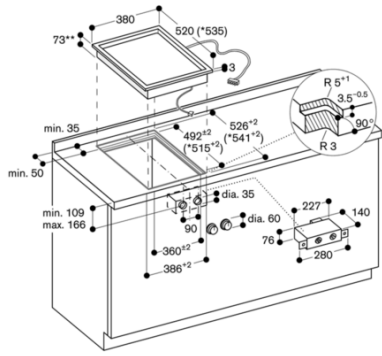



* with appliance cover or filler strip.
 See separate planning notes.
 ** 83 mm in the area of the cable clamp (right, centre).




Without cover




With cover/spacer button




- 380 Appliance
- 9 Connection strip
- 380 Appliance
- 3 Connection strip
- 380 Appliance
- 1146 Overhang
- 20
- 1126 Cut-out





- 380 Appliance
- 3 Connection strip
- 590 Appliance
- 3 Connection strip
- 380 Appliance
- 1396 Overhang
- 20
- 1336 Cut-out




- 380 Appliance
- 3 Connection strip
- 110 VL
- 3 Connection strip
- 380 Appliance
- 3 Connection strip
- 110 VL
- 3 Connection strip
- 380 Appliance
- 1372 Overhang
- 20
- 1302 Cut-out




- 110 VL
- 3 Connection strip
- 380 Appliance
- 3 Connection strip
- 110 VL
- 3 Connection strip
- 380 Appliance
- 3 Connection strip
- 110 VL
- 3 Connection strip
- 380 Appliance
- 3 Connection strip
- 110 VL
- 1661 Overhang
- 20
- 1661 Cut-out




- 380 Appliance
- 3 Connection strip
- 590 Appliance
- 9 Connection strip
- 380 Appliance
- 1288
- 20 Overhang
- 1336 Cut-out
- +20 Overhang
- +6 Silicone joint
- 1362 Cut-out with groove




- 380 Appliance
- 9 Connection strip
- 854 Appliance
- 1187
- 20 Overhang
- 1167 Cut-out
- +20 Overhang
- +6 Silicone joint
- 1192 Cut-out with groove




- 380 Appliance
- 9 Connection strip
- 110
- 9 Connection strip
- 380 Appliance
- 9 Connection strip
- 110
- 9 Connection strip
- 380 Appliance
- 1372
- 20 Overhang
- 1352 Cut-out
- +40 Overhang
- +6 Silicone joint
- 1376 Cut-out with groove

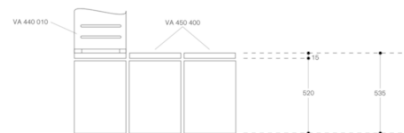





110	VL
9	Connection strip
590	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
1199	Overhang
-20	Overhang
1179	Cutout



110	VL
9	Connection strip
590	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
1199	Overhang
-20	Overhang
1179	Cutout
+20	Overhang
+6	Silicone joint
1226	Cutout with groove




380	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
1998	Overhang
-20	Overhang
1848	Cutout
+20	Overhang
+6	Silicone joint
1814	Cut-out with groove



380	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
9	Connection strip
110	VL
9	Connection strip
380	Appliance
1199	Overhang
-20	Overhang
859	Cutout

Installation of the control knob; surface mounting

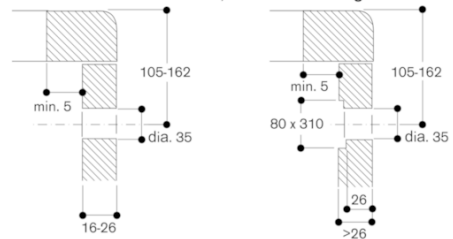

Installation of the control knob; flush installation

