



VR414111

- 1 x cast pan  
half size
- 2 x cast iron grill
- 1 x lava stones
- 1 x cleaning brush

LV030000:  
Lava stones

VA420004:  
Connecting strip Serie 400, flush, short

VA420010:  
Connecting strip Serie 400, top, short

VA440010:  
Appliance cover Vario 400 series

## Vario electric grill 400 series 38 cm VR414111

Two zones can be operated together or separately  
Cast pan, half size, for simultaneous frying and grilling on two separate surfaces  
Open cast grill, lava stones  
Solid stainless steel control knob  
Precision crafted 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting  
Can be combined perfectly with other Vario appliances of the 400 series

**Handling**  
Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic control in 12 output levels.

**Features**  
Cooktop, lava stone trough and grease collecting insert from stainless steel.  
Two zones, each 1500 W, can be operated together as a complete surface or each half separately.  
Two-part cast grill.


**Safety**  
Safety shut-off.  
Pre-heat and residual heat indicator.

**Planning notes**  
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
If installing with the appliance cover VA 440 take into account the additional space required for the depth.  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
A minimum lateral clearance of at least 100 mm from adjacent heat-sensitive furniture or from the wall must be observed.  
Appliance can be snapped into the worktop from above.

Appliance weight: approx. 26 kg.


**Connection**  
Total connected load 3.0 KW.  
Connecting cable 1.5 m without plug.

Installation of the control knob; flush installation

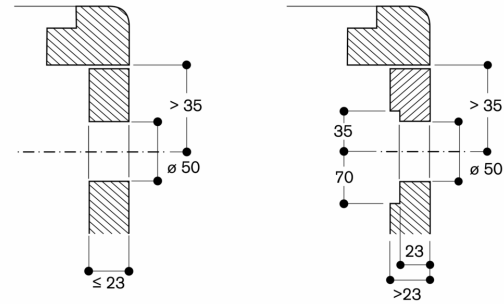


measurements in mm

Installation of the control knob; surface mounting

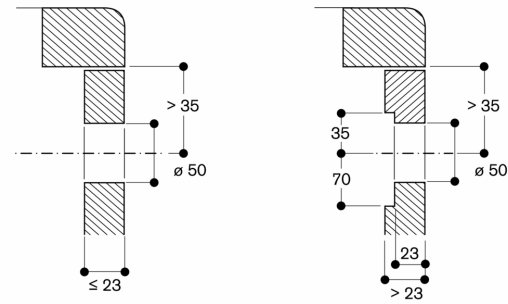


measurements in mm

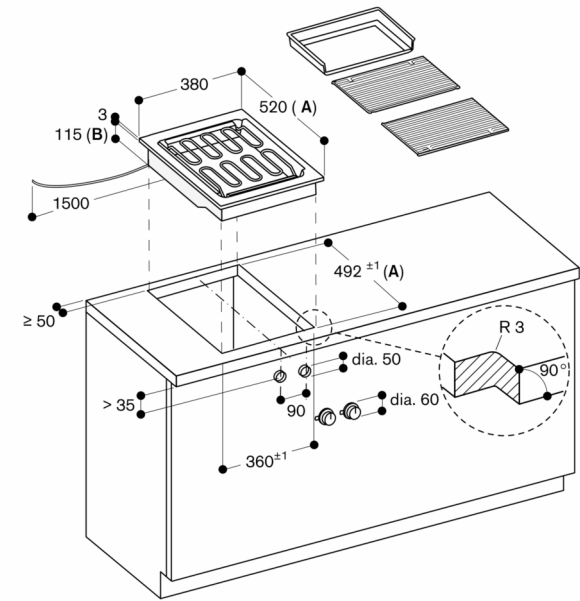

- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
B: 130 mm in the area of the cable clamp (left, on the rear side)


measurements in mm

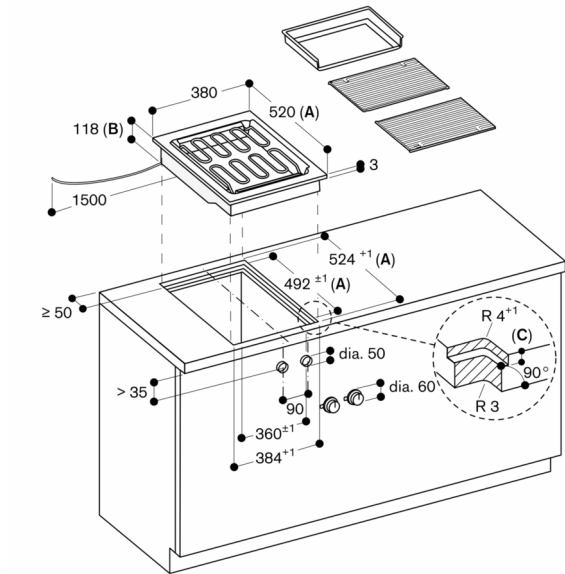

- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
B: 133 mm in the area of the cable clamp (left, on the rear side)  
C: 3.5<sup>+0.5</sup><sub>-0.5</sub> in combinations with frameless induction hobs

measurements in mm


Longitudinal section

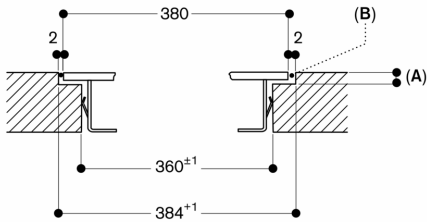

A: 3.5<sup>-0.5</sup>  
6.5<sup>+0.5</sup> in combinations with frameless induction hobs  
B: Fill with silicone

measurements in mm


View from above

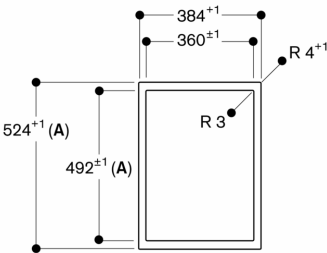

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Cross-section

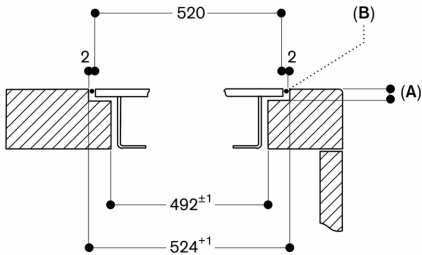


A: 3.5<sup>-0.5</sup>  
6.5<sup>+0.5</sup> in combinations with frameless induction hobs  
B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

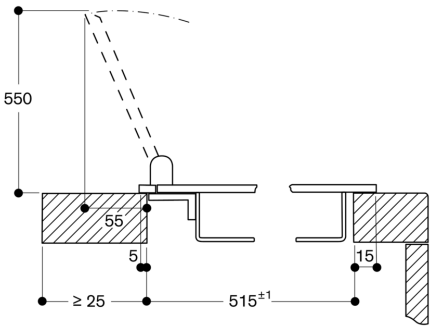

measurements in mm


Installation with appliance cover, flush mounting

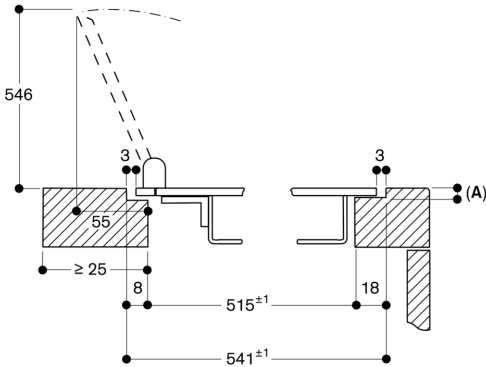

A: 3.5<sup>-0.5</sup>


measurements in mm

Installation with appliance cover, surface mounting

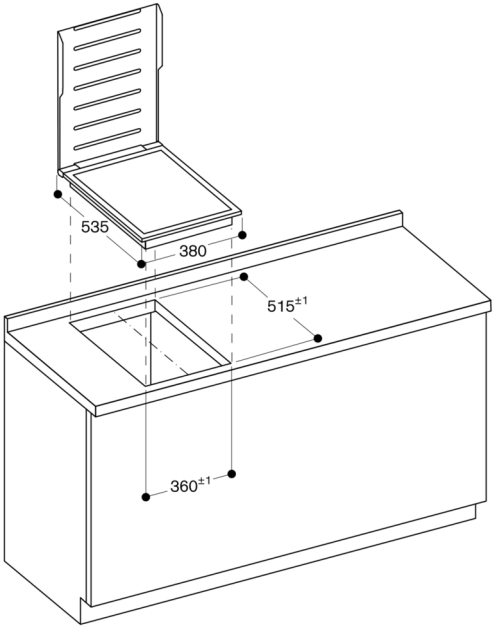

measurements in mm

## Installation with appliance cover, flush mounting

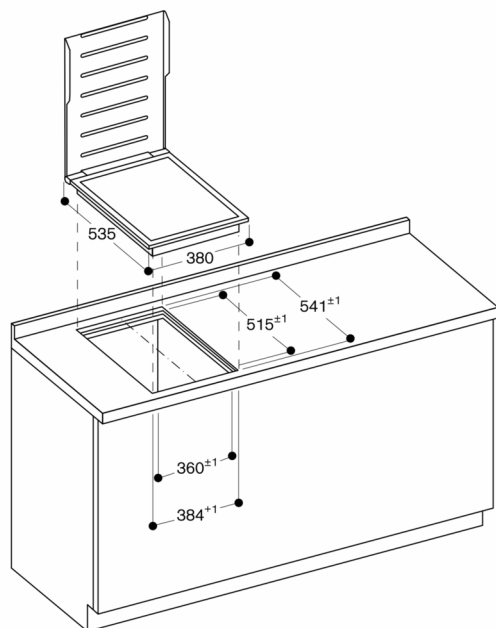

measurements in mm