



Two zones can be operated together or separately
 Cast pan, half size, for simultaneous frying and grilling on two separate surfaces
 Open cast grill, lava stones
 Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation
 Precision crafted 3 mm stainless steel
 For surface mounting with a visible edge or for flush mounting
 Can be combined perfectly with other Vario appliances of the 400 series

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
 Electronic control in 12 output levels.

Features

Cooktop, lava stone trough and grease collecting insert from stainless steel.
 Two zones, each 1500 W, can be operated together as a complete surface or each half separately.
 Two-part cast grill.

Safety

Safety shut-off.
 Pre-heat and residual heat indicator.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
 If installing with the appliance cover VA 440 take into account the additional space required for the depth.
 If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
 Additional instructions for flush mounting:
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
 The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
 If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
 A minimum lateral clearance of at least 100 mm from adjacent heat-sensitive furniture or from the wall must be observed.
 Appliance can be snapped into the worktop from above.
 Appliance weight: approx. 25 kg.

Connection

Total connected load 3.0 KW.

Characteristics

Frequency	50-60
Product name/family	Vario/Domino barbecue grill
Built-in / Free-standing	Built-in
Energy input	Electric
Type of control	Electronic
Grill grating material	Cast iron
Required niche size for installation (HxWxD)	118 x 360 x 492
Width of the appliance	380
Dimensions	118x380x520
Dimensions of the packed product (HxWxD)	400x460x600
Net weight	24.8
Gross weight	28.6
Residual heat indicator	yes
Location of control panel	Front
Basic surface material	Cast iron
Color of surface	Stainless steel, Stainless steel
Color of frame	Stainless steel
Length electrical supply cord	150
Connection Rating	3000
Gas connection rating	
Fuse protection	16
Voltage	220-240
Included accessories	1 x cast pan, half size, 2 x cast iron grill, 1 x lava stones, 1 x cleaning brush

Consumption and connection features

2025-12-17
 Page 1

Connecting cable 1.50 m without plug.

Color Variants

VR414115

Included accessories

1 x cast pan, half size.
 2 x cast iron grill.
 1 x lava stones.
 1 x cleaning brush.

Optional accessories


LV030000

Required installation accessories

CKR420000
 CKR420010

Installation Accessories


VA420004
 VA420010
 VA440010

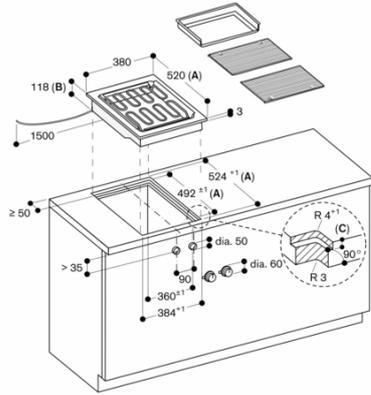

- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
- B: 133 mm in the area of the cable clamp (left, on the rear side)
- C: 3.5^{-0.5}
6.5^{+0.5}in combinations with frameless induction hobs


measurements in mm

Installation with appliance cover, flush mounting

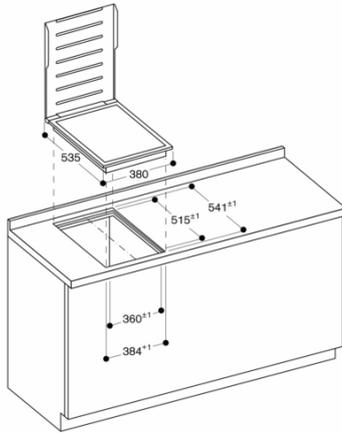


measurements in mm

Installation with appliance cover, surface mounting

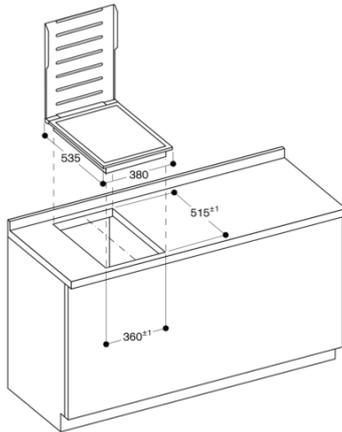

measurements in mm

Cross-section

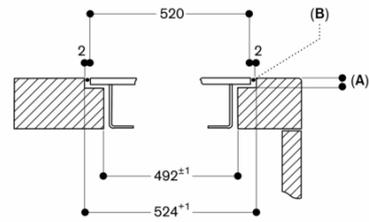


- A: 3.5^{-0.5}
6.5^{+0.5}in combinations with frameless induction hobs
- B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm


View from above



- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm


Longitudinal section

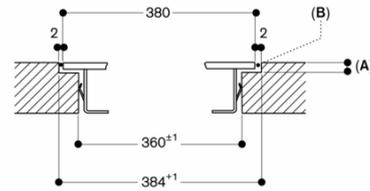

- A: 3.5^{-0.5}
6.5^{+0.5}in combinations with frameless induction hobs
- B: Fill with silicone


measurements in mm

Installation with appliance cover, flush mounting

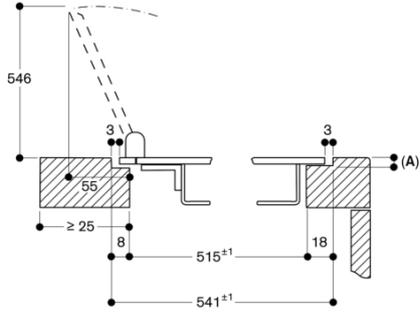


A: 3.5^{0.5}
measurements in mm

Installation with appliance cover, surface mounting

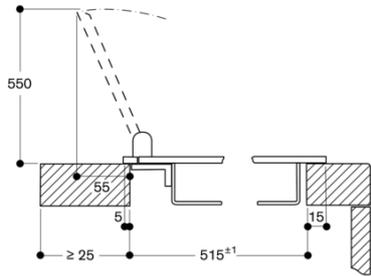


measurements in mm

Installation of the control knob; surface mounting

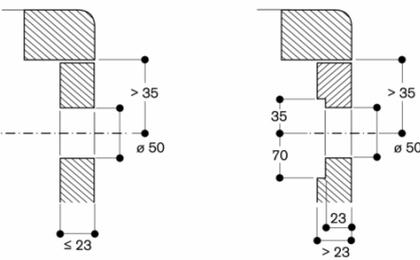


measurements in mm

Installation of the control knob; flush installation

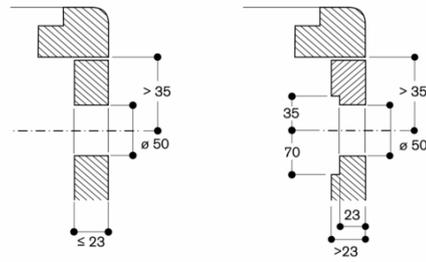

measurements in mm

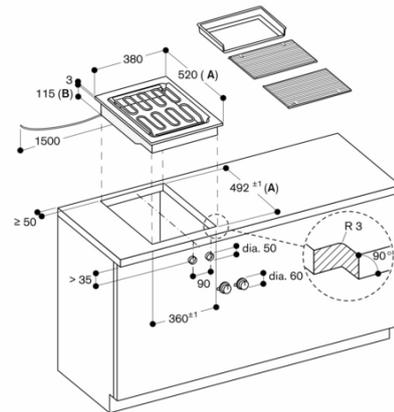

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
B: 130 mm in the area of the cable clamp (left, on the rear side)
measurements in mm