



Color Variants

BM484110

Included accessories

1 x combination grid.
1 x glass tub.

Handleless door / automatic door opening
Single operation and combination of microwave, grill and oven
Sequential operation of up to 5 modes incl. programming of combined operation and rest time
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control
Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.
Oven operation with 4 heating methods: Hot air 40 °C and from 100 °C to 250 °C, Full surface grill + hot air from 100 °C to 250 °C, Full surface grill + circulated air from 100 °C to 250 °C, Full surface grill with 3 levels of intensity, maximum output 2000 W.
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.
15 automatic programmes with weight indication, customisable:
4 defrosting programmes 4 cooking programmes 7 combination programmes
Option to save individual recipes.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Innowave.
Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
Triple door lock.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.
Interior back wall with catalytic coating.

Planning notes

Door hinge not reversible.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.
Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 110° door opening angle.
The mains socket needs to be planned outside of the built-in niche.

Connection

Total connected load 3.1 KW.
Connection cable 1.5 m without plug.

Characteristics

Type of micro-wave oven
MW-Combi

Type of control
Electronic

Dimensions
455x752x582

Cavity dimensions
236 x 445 x 348

Length electrical supply cord
150

Net weight
43.6

Gross weight
49.1

Maximum micro-wave power
1000

Number of Power Levels
5

Turntable
No

Turntable diameter (in)
Cavity material

Cavity material
Stainless steel

Door opening
Button

Clock
Yes

Max. extraction rate
Maximum output recirculating air

Ventilation Power Levels
Type of Filter

Illumin type - kind of lamps
Included accessories
1 x combination grid, 1 x glass tub

Height of the appliance
455

Width of the appliance
752

Depth of the product
582

Maximum micro-wave power
1000

Connection Rating
3100

Fuse protection
16

Voltage
220-240

Frequency
60; 50

Plug type
fixed connection, no plug

Connecting cable type
1-phase, neutral conductor

Universal Product Code
825225914112

Alternative colors available
Length of electrical supply cord (in)

Required cutout/niche size for installation (in)
x


Appliance Dimensions (h x w x d) (in)
Dimensions of the packed product

Net weight
96.000

Gross weight
108.000

Consumption and connection features

2025-12-15
Page 1

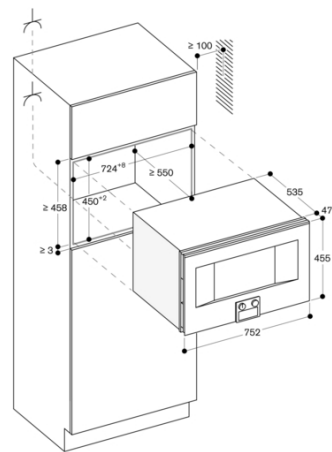

Socket
measurements in inches (mm)

Side view of BM 484/485 above BO

