



Color Variants

RW464301
fully integrated
Niche width 61 cm, Niche height 213.4 cm

Optional accessories

RA491631
Fully extendable bottle tray in beech and aluminium
RA492630
Fully extendable shelves in aluminium

Required installation accessories

RA460011
Additional side heating element

Installation Accessories

RA420010
Door lock
RA421610
RA425110
Handle bar, stainless steel, long
RA460020
Connecting element for vertically split appliance fronts (for a flush front)
RA460040
Finger protection for extra long furniture fronts

RW464301
Vario wine climate cabinet 400 series
fully integrated
Niche width 61 cm, Niche height 213.4 cm

Two independantly controllable climate zones
Consistant temperatures with exact control from +5 °C to +20 °C
Humidity control
Stainless steel interior
Fully extendable bottle trays in beech and aluminium
Presentation light option
Low-vibration operation
Capacity 98 bottles
Aluminium profiles of bottle trays and presenters for single bottle display can be labeled with Stabilo All 8046 pencil.

Handling

Electronic temperature control with digital display.

Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Antimicrobial activated charcoal air filter.
UV-protection.
Energy-saving vacation mode.
Open-door and malfunction alarm.

Features

Net volume 390 litres.
Capacity 98 bottles (based on 0.75/l standard bottles).
10 fully extendable bottle trays, up to 4 of which for storage of magnum bottles.
Space for max. 14 bottle trays or shelves in aluminium.
Interior lighting with 2 ceiling spots in each climate zone, can be used as presentation light.

Product rating

Energy efficiency class A.
Energy consumption 174 kwh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 74 kg.
The main socket needs to be planned outside of the niche.
No transport/operation above 1.500 m sea level.

Connection

Total connected load 0.131 kW.
Connecting cable 3.0 m, pluggable.



Characteristics

Construction type
Built-in
Door panel options
Not possible
Height (mm)
2125
Width of the product (mm)
603
Depth of the product
608
Required niche size for installation (HxWxD)
2134.0 x 610 x 610
Net weight (kg)
158.000
Connection rating (W)
131
Current (A)
10
Interior ventilator
Yes
Voltage (V)
220-240
Frequency (Hz)
50
Approval certificates
CE, VDE
Length of electrical supply cord (cm)
300
Plug type
Gardy plug w/ earthing
Energy consumption (kWh/d) winecooler
0.65
Energy consumption per Year (kWh/a) winecooler
236.5
Total unit gross capacity (l)
445
Number of compressors
1
Number of independent cooling systems
1
Reversible Door Hinge
Yes
Interior light switch
No
EAN code
4242006217655


Consumption and connection features

Brand
Gaggenau
Product name / Commercial code
RW464301
Product category
Winestorage
Energy efficiency class (2010/30/EC)
A
Energy consumption annual (kWh/ annum) - NEW (2010/30/EC)
174.00
Capacity in 0.75l (bordeaux bottles)
98
Climate class
SN-T
Noise level (dB(A) re 1 pW)
42



created on 2019-05-06
Page 1

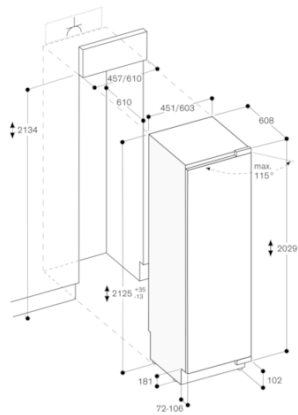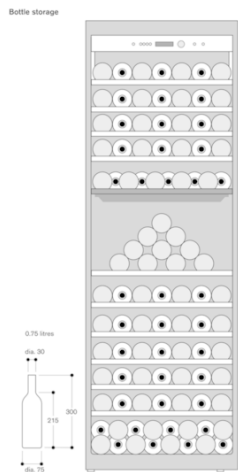


The maximum door panel dimensions are based on a clearance of 3 mm.

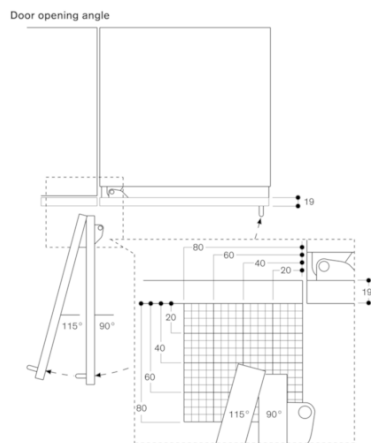

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

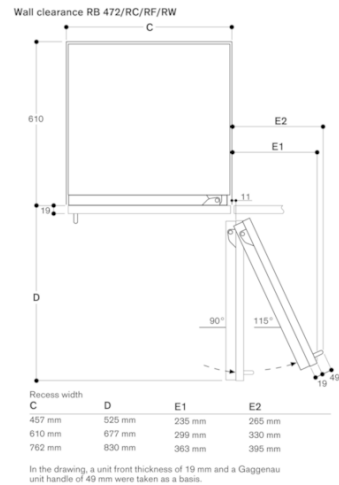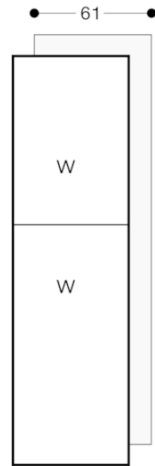

Base detail

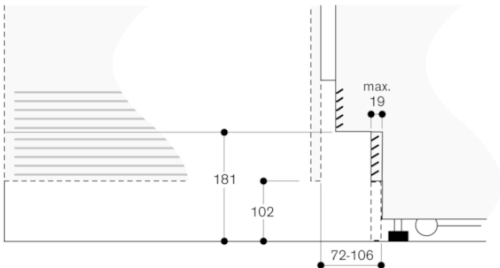

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.

RW464301
Vario wine climate cabinet 400 series
fully integrated
Niche width 61 cm, Niche height 213.4 cm
created on 2019-05-06
Page 3

