



#### Color Variants

BMP225100

BMP225110

#### Included accessories

1 x glass pan.

1 x grid.

#### Product Variants

BMP224100

Flush installation  
Handleless door / automatic door opening  
Single operation and combination of microwave and grill  
Sequential operation of up to 5 modes incl. programing of combined operation and rest time  
TFT touch display  
Electronic temperature control  
Interior volume 21 litres

#### Programs

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.  
Full surface grill with 3 levels of intensity, maximum output 1300 W.  
Full surface grill with microwave output levels 360, 180 and 90 W combinable.  
10 automatic programs with weight indication:  
3 defrosting programs 4 cooking programs 3 combination programs  
Option to save individual recipes.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Actual temperature display.  
25 W interior light.  
Hygienic stainless steel interior with glass ceramic base.

#### Safety

Thermally insulated door with double glazing.  
Triple door lock.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Planning notes

Door hinge not reversible.  
Minimum installation height 85 cm (top edge of niche bottom).  
Height-adjustable feet.  
Installation of BMP above BOP with intermediate shelf.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When planning a corner solution, pay attention to the 90° door opening angle.

#### Connection

Total connected load 2.0 KW.  
Connection cable 1.7 m, detachable.

#### Characteristics

Type of micro-wave oven

MW+Grill function

Color / Material Front

Anthracite

Built-in / Free-standing

Built-in

Door opening

Button

Cleaning

No

Control Panel Material

Glass

Door colour

Anthracite

Dimensions (HxWxD)

382x590x321

Dimensions of the packed product

(HxWxD)

470x460x670

Required niche size for installation

(HxWxD)

362-362 x 560-560 x 320

Cavity dimensions

220 x 350 x 270

Cavity capacity

21

Maximum micro-wave power

900

Number of interior lights

1

Net weight

18.9

Gross weight

21.6

EAN code

4242006218485

Connection Rating

1990

Fuse protection

10

Voltage

220-240

Frequency

60; 50

Length electrical supply cord


170

#### Consumption and connection features

2025-12-17


Page 1

Installation in an upper cabinet

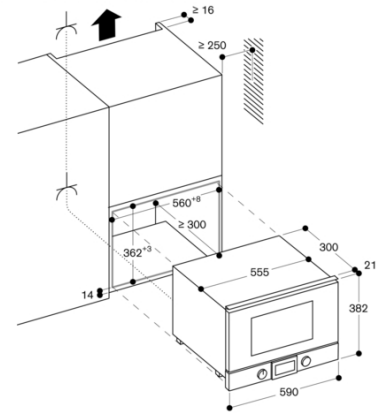

Socket  
measurements in mm

Installation in a tall cupboard

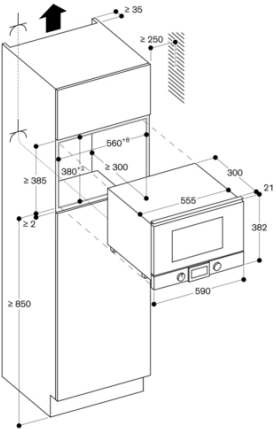

Socket  
measurements in mm

Side view of BMP 224/225 over BOP

