



AW250172
Wall-mounted hood 200 series
Full glass front in Gaggenau anthracite
Width 70 cm
Air extraction/recirculation
Delivery without chimney



Angled vapour screen provides particularly generous free space above the cooktop

Filter cover with easy to clean glass front

Glass cover fitting to oven 200 series

Energy-saving, low-noise fan

Vapours can be caught efficiently thanks to two suction areas on the underside and front

The glass panel can be extended forward to increase the area for catching vapours during particularly intensive cooking

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable ambient lighting allows light to be adjusted individually

Air extraction or recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to DIN EN 61591.

Sound power level according to EN 60704-3.

Sound pressure level according to EN 60704-13.

95% odour reduction.

Features

Three electronically controlled power levels and an intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter and activated charcoal filter saturation indicator.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Integrated WiFi module for digital services

(Home Connect).

The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Metal grease filter, dishwasher-safe. Glass filter cover in Gaggenau anthracite.

2 activated charcoal filter fitted in appliance ex factory.

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 2 x 3w LED Light.

Illuminance: 519 lx

Indirect LED light (3.000 K), dimmable.

Fan technology with highly efficient, brushless DC motor.

Integrated sound insulation for quiet operation.

Easy to clean inner frame.

Easy mounting system for simple installation and alignment.

Product rating

Energy consumption 36.7 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 43 dB / max. 57 dB normal mode.

Planning notes

Characteristics

Product name/family

Color chimney

Typology

Wall-mounted

Approval certificates

CE, Eurasian, G-Mark, Ukraine, VDE

Length of electrical supply cord

130

Required niche size for installation

(HxWxD)

Height of the chimney

Height of product, without chimney

452

Minimum distance above an electric hob

450

Minimum distance above a gas hob

650

Net weight

21.170

Type of control

Electronic

Number of speed settings

Maximum output air extraction

529

Boost position output recirculating

670.0

Maximum output recirculating air

461

Boost position air extraction

990

Number of lights (Stck)

2

Noise level

57

Diameter of air outlet

150

Grease filter material

Washable aluminium

EAN code

4242006264536

Connection rating

270

Fuse protection

10

Voltage

220-240

Frequency

60; 50

Plug type

Gardy plug w/ earthing

Installation type

Wall-mounted

Consumption and connection features

created on 2021-10-28

Page 1

Color Variants

AW250172

Full glass front in Gaggenau anthracite

Width 70 cm

Optional accessories

AA250112

2 regenerable activated charcoal filter

AA250113

2 activated charcoal filter

Installation Accessories

AD200012

Stainless steel air extraction chimney

The ventilation appliance is supplied for air recirculation mode only without a chimney. The special accessory AD 200 012 is available for potential air extraction mode.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 45 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs a suitable safety switch.

Connection

Total connected load 270 W.

Connecting cable 1.3 m with plug.


Power consumption standby/display off 0.5 W.

Please check the user manual for how to switch off the WiFi module.


AW250172
Wall-mounted hood 200 series
Full glass front in Gaggenau anthracite
Width 70 cm
Air extraction/recirculation
Delivery without chimney

created on 2021-10-28
Page 2

Side view

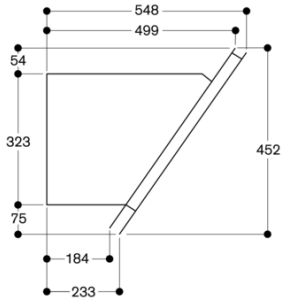

Air recirculation

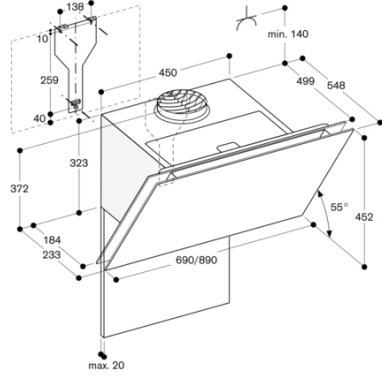

Air extraction

