



Color Variants

VI422113
Stainless steel frame
Width 38 cm

Optional accessories

CA051300
Teppan Yaki plate made of multi ply material
CA052300
Griddle plate in cast aluminium
GP900001
Stainless steel frying sensor pan
GP900002
Stainless steel frying sensor pan
GP900003
Stainless steel frying sensor pan

Installation Accessories

VA420004
Connection strip for combination with other Vario appliances of the 400 series for flush installation
VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface installation

VI422113
Vario flex induction cooktop 400 series
Stainless steel frame
Width 38 cm

Flex function for combining the rectangular cooking areas
Free positioning of cookware inside combined cooking areas
Frying sensor function for temperature control in pans
Easy control of all functions with two color displays
Solid stainless steel control knob
Precision crafting of 3 mm stainless steel
For surface installation with a visible edge or for flush installation
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas 24x19 cm (2200 W, with booster 3700 W), linked together 24x38 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 stage (1...12).
User friendly control with two color display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).
Integrated WiFi module for digital services (Home Connect).
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Safety

Operation indicator.
Pot detection.
2 stage Hh residual heat indicator for each zone
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.
The horizontal positioning of the knobs may be aligned with the specific cooking areas.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

Characteristics

Product name/family
Vario/Domino cooking zone cera

Product name/family
Vario/Domino cooking zone cera

Construction type
Built-in

Construction type
Built-in

Energy input
Electric

Energy input
Electric

Total number of positions that can be used at the same time
2

Total number of positions that can be used at the same time
2

Required niche size for installation (HxWxD)
57 x 360 x 490-500

Required niche size for installation (HxWxD)
57 x 360 x 490-500

Width of the appliance
380

Width of the appliance
380

Dimensions
57 x 380 x 520

Dimensions
57 x 380 x 520

Dimensions of the packed product (HxWxD)
120 x 580 x 600

Dimensions of the packed product (HxWxD)
120 x 580 x 600

Net weight
9.9

Net weight
9.9

Gross weight
10.9

Gross weight
10.9

Residual heat indicator
Separate

Residual heat indicator
Separate

Location of control panel
External control

Location of control panel
External control

Basic surface material
Ceramic

Basic surface material
Ceramic

Color of surface
Black, Stainless steel

Color of surface
Black, Stainless steel

Color of frame
Stainless steel

Color of frame
Stainless steel

Approval certificates
AENOR, CE

Approval certificates
AENOR, CE

Length of electrical supply cord
150

Length of electrical supply cord
150

EAN code
4242006285029

EAN code
4242006285029

Electrical connection rating
3700

Electrical connection rating
3700

Gas connection rating

Gas connection rating

Fuse protection
16

Fuse protection
16

Voltage
220-240

Voltage
220-240

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush installation:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 10.

Connection


Total connected load 3.7 KW.
Connecting cable 1.5 m without plug.
Power consumption standby/display off 0.5 W.

Power consumption standby/network 1.4 W.

Please check the user manual for how to switch off the WiFi module.


GAGGENAU

Installation of the control knob; flush installation

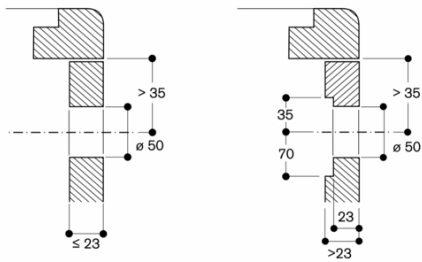


measurements in mm


Installation of the control knob; surface mounting

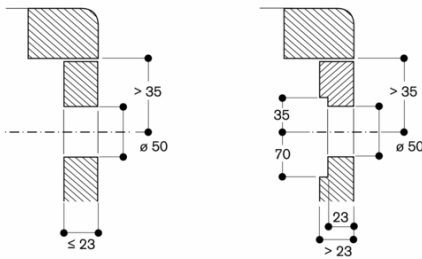


measurements in mm

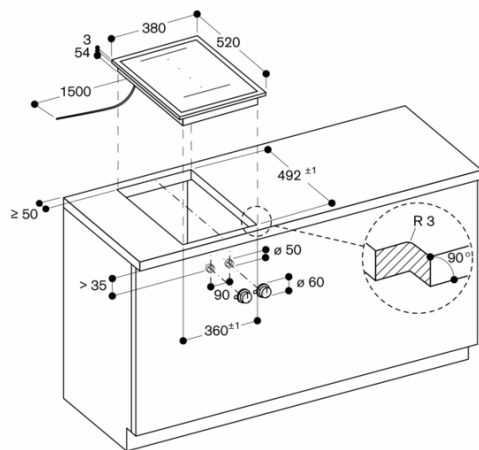

measurements in mm

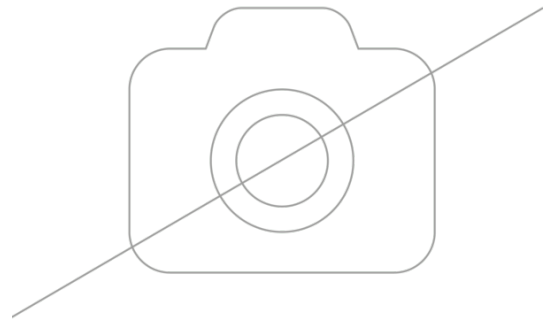


View from above




measurements in mm

Cross-section

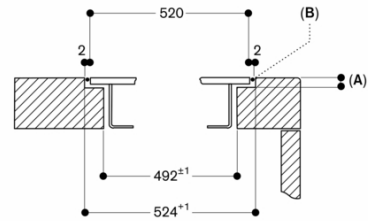

A: 3.5^{0.5}
 B: Fill with silicone
 measurements in mm

Longitudinal section

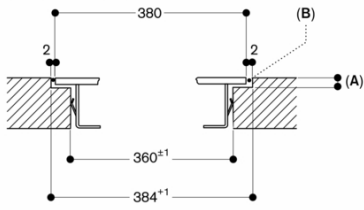

A: $3.5^{+0.5}$
B: Fill with silicone
measurements in mm