



Color Variants

CM470111
Stainless steel behind glass-backed full glass door
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CM470111
Fully automatic espresso machine 400 series
Stainless steel behind glass-backed full glass door
Width 60 cm
Controls at the top

Handleless door / automatic door opening
Fixed inlet and outlet water connection
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
One-touch operation
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage
Ristretto / 2 x Ristretto. Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato. Coffee / 2 x Coffee. Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White. Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

Handling
Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
Coffee: 3 grades.
Hot water: 10 grades.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features
Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for single beverage order.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.
Fresh water-function to refill the water tank with fresh water.
Electronic fill level control for drip tray and container for coffee residue.

Safety

Characteristics
Built-in / Free-standing
Built-in
Frothing nozzle
No
Display
No
Water protection system
No
Portion sizes
All cups
Dimensions
455 x 590 x 537
Dimensions of the packed product (HxWxD)
545 x 475 x 670
Required niche size for installation (HxWxD)
449 x 558 x 347
EAN code
4242006263812
Electrical connection rating
1600
Fuse protection
10
Voltage
220-240
Frequency
50/60
Plug type
Gardy plug w/ earthing

Consumption and connection features
2021-09-24
Page 1

Child lock.
Cleaning
Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.



Planning notes
Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
The door panel surface of the appliance extends 47 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 150 mm lower than the appliance outlet (see drawing "drainage connection").
If the appliance is placed too far from the main siphon, the drain system has to be adjusted on-site (building installation).
The water connection for the inlet hose must always be accessible and not located directly behind the appliance.
The connection of the outlet hose to the siphon must not be directly behind the appliance and should be accessible.
Special accessories (order as spare parts): Part No. 17000705 Water filter
Part No. 00311819 Descaling tablets
Part No. 00311769 Cleaning tablets
Part No. 00636455 Door hinge restrictor (92° opening angle) Part No. 11015223 Bean container with lid

Connection
Total connected load 1.6 KW.
Only cold water connection.
Inlet hose 165 cm with 3/4 " (26.4 mm) connection, extendable.
Outlet hose (ø 18 mm) 170 cm (HT-Hose).


CM470111
 Fully automatic espresso machine 400 series
 Stainless steel behind glass-backed full glass door
 Width 60 cm
 Controls at the top

2021-09-24
 Page 2


Drainage connection

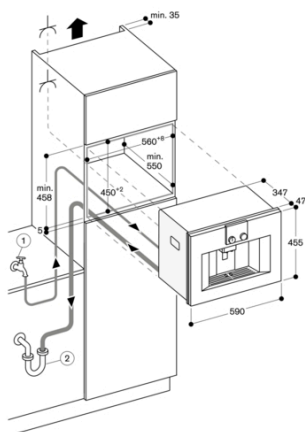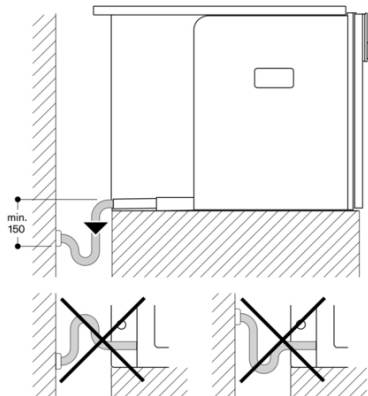

View from rear

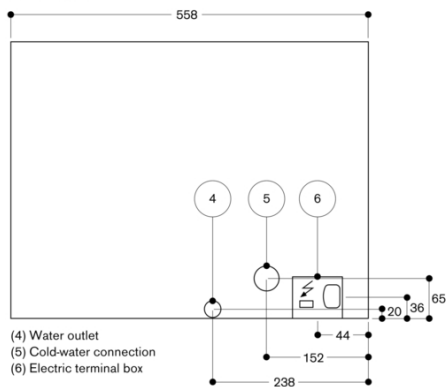

Left corner installation

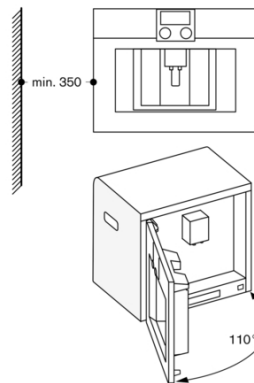

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.